

City of San Antonio

ADDENDUM I

SUBJECT: Formal Invitation For Bid (IFB) 6100006151 Tractor and Mower Attachments scheduled to open Wednesday, June 24, 2015 date of issue June 4, 2015.

DATE: June 18, 2015

THE ABOVE MENTIONED INVITATION FOR BID (IFB) IS HEREBY AMENDED AS FOLLOWS:

1. **THE BID OPENING IS HEREBY EXTENDED TO FRIDAY, JUNE 26, 2015, 2:00 P.M. CENTRAL TIME.**
2. IFB Document Section 004 – Specifications / Scope of Services, Item Description changed to read:

4.4	ITEM	QUANTITY	DESCRIPTION
	2	1	Turnkey Diesel Tractor with Rear Mounted Mower

Changed to read:

- 4.4.4 TIRES: Front tires will be tread lug type 14.9 x 24, minimum 22 ply. Rear tires will be 18.4 x 30 logger specials, minimum 10 ply. Wheels to be adjusted to maximum gauge.

Changed to read:

- 4.4.5 INSTRUMENTS, GAUGES, AND LIGHTING: Tachometer, hour meter, fuel gauge, engine coolant temperature gauge, oil pressure warning indicator/gauge, alternator charging indicator/gauge, air cleaner indicator, two (2) headlights, tail lights, 4-way flash stop lights, turn signals and license plate bracket with illumination. Install 4 LED strobe lights total wired to battery disconnect switch, two atop of cab facing forward and two atop of cab facing rear.

Changed to read:

- 4.4.7 ADDITIONAL ITEMS: Seat belts, slow moving vehicle emblem attached to left rear. ROPS cab with air conditioner (roof mount not acceptable), all windows to be OEM tinted with safety glass. Windshield wiper/washer front only, deluxe suspension seat, locking fuel cap. Minimum of 6 removable 50 lbs. front weights to allow safe driving at all speeds, fuel tank (skid plate) protection if required. Safety start type key ignition. Back-up alarm installed. Battery boost terminals

mounted under right step. Locking hood and battery disconnect switch installed inside of cab.

4.4.9 **MINIMUM SPECIFICATIONS FOR 15' BATWING MOWER ATTACHMENT:**

Changed to read:

4.4.9.3 The mower must cut up to maximum diameter material for a 15' batwing wing mower.

Changed to read:

4.4.9.4 The mower to have a spring-cushioned axle or torsion suspension. The mower shall be equipped with a hydro-mechanical level- lift system for uniform cut.

Changed to read:

4.4.11 **TIRES:** Minimum six (6) segmented tail wheels shall be featured as standard equipment for rear or mower with a heavy duty sealed bearings.

4.5	ITEM	QUANTITY	DESCRIPTION
	3	1	Tractor 4wd with loader/ bi-directional

Changed to read:

4.5.4 **TIRES:** Front tires will be tread lug type 14.9 x 24, minimum 22 ply. Rear tires will be 18.4R30 logger specials, minimum 10 ply. Wheels to be adjusted to maximum gauge.

Changed to read:

4.5.6 **INSTRUMENTS, GAUGES, AND LIGHTING:** Tachometer, hour meter, fuel gauge, engine coolant temperature gauge, oil pressure warning indicator/gauge, alternator charging indicator/gauge, air cleaner indicator, two (2) headlights, tail lights, 4-way flash stop lights, turn signals and license plate bracket with illumination. Install 4 LED strobe lights total wired to battery disconnect switch, two atop of cab facing forward and two atop of cab facing rear.

Changed to read:

4.5.8 **ADDITIONAL ITEMS:** Seat belts, slow moving vehicle emblem attached to left rear. ROPS cab with air conditioner (roof mount not acceptable), all windows to be OEM tinted with safety glass. Windshield wiper/washer front only, deluxe suspension seat, locking fuel cap. Minimum of 6 removable 50 lbs. front weights to allow safe driving at all speeds, fuel tank (skid plate) protection if required. Safety start type key ignition. Back-up alarm installed. Locking hood and battery disconnect switch installed inside of cab.

4.6	ITEM	QUANTITY	DESCRIPTION
	4	8	Tractor without Mowers or Mower Attachments

Changed to read:

4.6.4 TIRES: Front tires will be tread lug type 14.9 x 24, minimum 22 ply. Rear tires will be 18.4 x 30 logger specials, minimum 10 ply. Wheels to be adjusted to maximum gauge.


Changed to read:

4.6.5 INSTRUMENTS, GAUGES, AND LIGHTING: Tachometer, hour meter, fuel gauge, engine coolant temperature gauge, oil pressure warning indicator/gauge, alternator charging indicator/gauge, air cleaner indicator, panorama windshield with RH door, two (2) headlights, tail lights, 4-way flash stop lights, turn signals and license plate bracket with illumination. Install 4 LED strobe lights total wired to battery disconnect switch, two atop of cab facing forward and two atop of cab facing rear.

Changed to read:

4.6.7 ADDITIONAL ITEMS: Seat belts, slow moving vehicle emblem attached to left rear. ROPS cab with air conditioner (roof mount not acceptable), all windows to be OEM tinted with safety glass. Windshield wiper/washer front only, deluxe suspension seat, locking fuel cap. Additional storage compartments, front & rear roller blind, inner rear view mirror. Minimum of 6 removable 50 lbs. front weights to allow safe driving at all speeds, fuel tank (skid plate/guard) protection if required. Safety start type key ignition. Back-up alarm installed. Locking hood and battery disconnect switch installed inside of cab.

4.6.9 DELETED

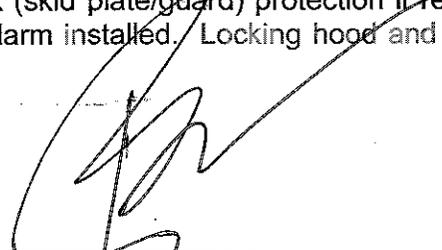

Paul J. Calapa
Purchasing Administrator
Finance Department, Purchasing

