



CITY OF SAN ANTONIO

ADDENDUM NO. 2

CITY OF SAN ANTONIO
CAPITAL IMPROVEMENTS MANAGEMENT SERVICES

PROJECT NAME: **CREIGHTON STREET IMPROVEMENTS - (40-00252)**

DATE: August 2, 2012

This addendum should be included in and be considered part of the plans and specifications for the name of the project. The contractor shall be required to sign an acknowledgement of the receipt of this addendum and submit with their bid.

GENERAL:

1. What is the estimated value for the referenced project?

Response: The estimated value for project is:

CPS Gas	\$374,318.79
SAWS Sewer	\$347,221
SAWS Water	\$364,364
<u>Roadway</u>	<u>\$723,621</u>
Total	\$1,809,524.79

2. Which plan set includes the CPS Gas? How much is a set of the gas plans in the event that they are not available on line?

Response: Gas plans are included in CPS Specifications

3. Some items are not shown in SAWS plans

Response: Items with an asterisk are contingency items and are not shown in SAWS plans.

4. It appears motorized gate has been removed on a property. What is done on that bid regarding that quantity?

Response: Include quantities as shown in bid sheet.

5. How are adjusting G.M.H. called out on bid items?

Response: Callouts for adjusting G.M.H are gas valves. Gas valves on abandoned gas mains can be removed (See Page 5 of 9 on Gas Plans. See also Note 5 on Gas plans) CPS will provide a one-time valve adjustment service on exiting mains that require valve adjustments.



CITY OF SAN ANTONIO

6. What is brick column?
Response: There are three existing brick columns (approximately 4' in height) that are attached to a fence. The brick columns will need to be removed and relocated to the R.O.W.

7. What is the curb drain on sheet 33?
Response: See attached *Standard Curb Drain* and *Pipe Drain Detail*.

END OF ADDENDUM No. 2

ADDENDUM REVIEWED & APPROVED BY:

Heather E.S. O'Gorman

Heather E.S. O'Gorman, P.E.

8/2/2012

Date

NOTICE TO PLANHOLDERS:

Please insert this Addendum into your copy of the Project Construction Documents.



CITY OF SAN ANTONIO

**CITY OF SAN ANTONIO
DEPARTMENT OF CAPITAL IMPROVEMENTS MANAGEMENT SERVICES
CONTRACT SERVICES DIVISION**

RECEIPT OF ADDENDUM NUMBER(S) 2 IS HEREBY ACKNOWLEDGED FOR PLANS
AND SPECIFICATIONS FOR CONSTRUCTION OF: **CREIGHTON STREET**
IMPROVEMENTS FOR WHICH BIDS WILL BE OPENED ON Tuesday August 7, 2012 at
2:00 PM

THIS ACKNOWLEDGEMENT MUST BE SIGNED AND RETURNED WITH
THE BID PACKAGE.

Company Name: _____

Address: _____

City/State/Zip Code: _____

Date: _____

Signature

Print Name/Title

*PATCH CURB CUT-OUT WITH 3000
PSI CONCRETE, CONTOUR AND
GUTTER LINE TO MATCH

*SAW CUT TO
REMOVE EXISTING
CURB SECTION

DOWEL 8-INCH LONG,
#3 BARS, DRILLED
INTO PAVEMENT


2 - #3 BARS,
2'-4" LONG

SEE PLANS FOR
REQUIRED SLOPE
OR 0.3% MIN.


2.5" MINIMUM
4"
DIA. MAX.

GUTTER PER
CITY STANDARDS

SECTION A-A

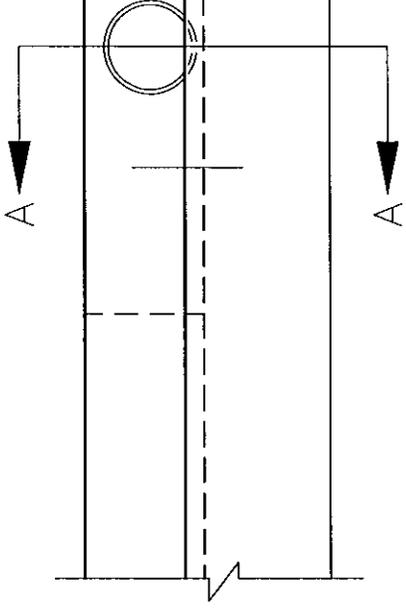

FRONT VIEW

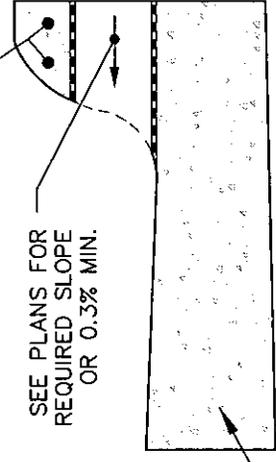


GENERAL NOTES:

- 1) CURB DRAINS SHALL NOT BE CONSTRUCTED WITHIN 18 INCHES OF CONTRACTION OR EXPANSION JOINTS.
- 2) PIPE TO BE INSTALLED WITH CURB FOR MONOLITHIC POUR.
- * 3) WHEN PLACING DRAIN THROUGH EXISTING CURB, REMOVE AND REPLACE A 1-FT CURB SECTION
- 4) DRAIN PIPE NOT TO PROTRUDE BEYOND CURB FACE
- 5) JOINT NEAREST TO PIPE SHALL BE AN EXPANSION JOINT.

STANDARD CURB DRAIN

GRAVEL SIZE TO BE
0.5" TO 1".


GRAVEL TO BE WRAPPED
WITH CONTECH C-100 NW
NON-WOVEN GEOTEXTILE
(OR APPROVED EQUAL)
6" MIN. OVERLAP

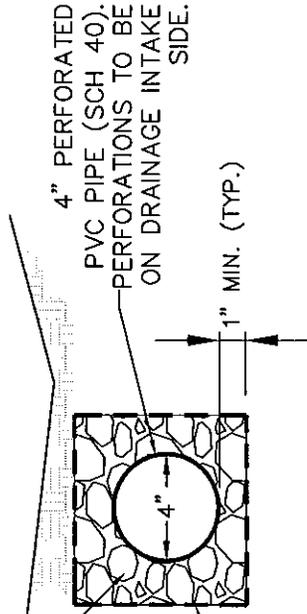


DRAIN DETAIL A

GENERAL NOTES:

1. REFER TO SECTIONS FOR ADDITIONAL INFORMATION
2. CONTRACTOR TO VERIFY ELEVATIONS AT FLOW LINES PRIOR TO CONSTRUCTION TO ENSURE POSITIVE DRAINAGE IN PIPE.
3. CONTRACTOR TO CONTACT ENGINEER FOR DISCREPANCIES IN SURVEYED ELEVATIONS.

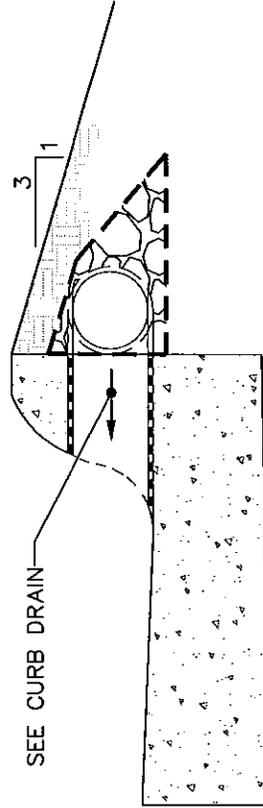

DRAIN DETAIL B
DRAIN TO CURB FACE

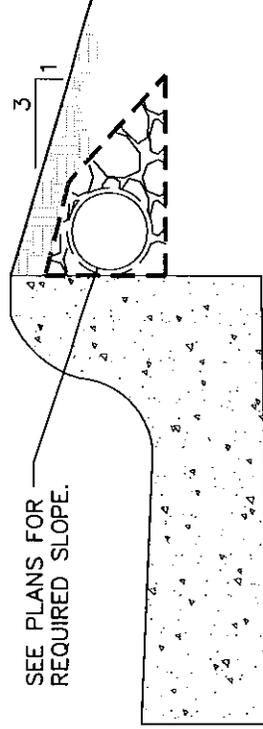

DRAIN DETAIL C
ADJACENT TO CURB

PIPE DRAIN DETAIL