



CITY OF SAN ANTONIO

P.O. Box 839966
San Antonio, Texas 78283-3966

ADDENDUM No. 1

SUBJECT: Formal Invitation Bid (IFB) For 2014 – 2015 Reclamation Task Order Contract Package 7, Dated November 8, 2013

DATE: **December 2, 2013**

Addendum No. 1 includes the following:

- Remove item SP800, Project Signs, from the 025 Unit Pricing Form
- Include specifications for Project Signs
- Include Tentative Project List

The following sections replace the corresponding sections listed in the 081 General Conditions:

1. Bonds

11.3.1.1 PERFORMANCE BOND. A good and sufficient bond in an amount equal to one hundred percent (100%) of the total Contract Sum or Individual Task Order Amount, guaranteeing the full and faithful execution of the Work and performance of the Contract in accordance with Plans, Specifications and all other Contract Documents, including any extensions thereof, for the protection of Owner. This bond shall also provide for the repair and maintenance of all defects due to faulty materials and workmanship that appear within a period of one (1) year from the date of final Completion or acceptance of the Work by the Owner or lesser or longer periods as may be otherwise designated in the Contract Documents.

11.3.1.2 PAYMENT BOND. A good and sufficient bond in an amount equal to 100% of the total Contract Sum or Individual Task Order Amount, guaranteeing the full and prompt payment of all claimants supplying labor or materials in the prosecution of the Work provided for in the Contract, and for the use and protection of each claimant.

11.3.2 If the total Contract Sum or Individual Task Order Amount, is greater than \$100,000, Performance and Payment Bonds equaling one hundred percent (100%) of the total Contract Sum or Individual Task Order Amount are mandatory and shall be provided by Contractor. If the total Contract Sum or Individual Task Order Amount is greater than \$25,000 but less than or equal to \$100,000, only a Payment Bond equaling One hundred percent (100%) of the total Contract Sum or Individual Task Order Amount is mandatory; provided, however, that Contractor also may elect to furnish a Performance Bond in the same amount if Contractor so chooses. If the total Contract Sum or Individual Task Order Amount is less than or equal to \$25,000, Contractor may elect not to provide Performance and Payment Bonds; provided that in such event, no money will be paid by Owner to Contractor until Final Completion of all Work. If Contractor elects to provide Performance and Payment Bonds, the

Contract Sum or Individual Task Order Amount shall be payable to Contractor through progress payments in accordance with these General Conditions.

2. Retainage

All information regarding retainage is not applicable. Retainage shall not be held.

****NOTE ADDENDUM ACKNOWLEDGEMENT FORM IS REQUIRED TO BE RETURNED WITH THE BID PACKAGE****

CITY OF SAN ANTONIO
025 UNIT PRICING FORM
REVISED 12/2/13

PROJECT NAME: 2014 - 2015 Reclamation Task Order Contract Package 7
PROJECT NO. 23-01403-07-05-01

ALT. NO.	ITEM NO.	DESC. CODE	S.P. NO	BID ITEM DESCRIPTION	UNIT OF MEASURE	APPROX. QUANTITIES	UNIT BID PRICE	AMOUNT	ITEM SEQUENCE NO.
	103.1			Remove Concrete Curb	LF	5,800			
	103.3			Remove Sidewalks and Driveways	SY	5,180			
	103.4			Remove Miscellaneous Concrete	SF	500			
	104.1			Street Excavation	CY	750			
	107.1			Embankment (Final)(Ordinary Compaction) TY B	CY	150			
	200.2			Flexible Base (6 inch loose depth)	SY	7,880			
	202.1			Prime Coat	GAL	1,576			
	203.1			Tack Coat	GAL	500			
	205.4			Hot Mix Asphaltic Pavement Type D (2.0-inch compacted depth)	SY	78,800			
	208.2			Salvaging, Hauling & Stockpiling Reclaimable Asph. Pvm't (Loose Vehicle Measurement)	CY	1,500			
	209.1			Bus Stop Concrete Pavement (10" depth)	SY	333			
	230.3			Replacing Base & Pvmt With Type A Pvmt (6" Compacted Depth)	SY	4,000			
	230.3			Replacing Base & Pvmt With Type A Pvmt (8" Compacted Depth)	SY	1,000			
	236.1			Emulsion (CSS-1H)	GAL	181,000			
	236.2			Emulsion Treatment (Existing Base) (6 inch compacted depth)	SY	70,920			
	236.3			Emulsion Treatment (Mixing Existing Material and New Base) (6 inch compacted depth)	SY	7,880			
	241			Emulsion Aggregate Slurry Seal Mix	SY	2,000			
	250			Seal Coat	SY	78,800			
	315			Fog Seal (TRMSS)	GAL	3,000			
	403.1A			Inlet Top Reconstruction	EA	2			
	404.1			Corrugated Metal Pipe (Galvanized Steel)(24" Diameter)	LF	40			
	413.2			Flowable Fill (High Strength)	CY	40			
	438			Cleaning Existing Joints	LF	200			
	454			Header Type Expansion Joint Sealant	LF	200			
	500.1			Concrete Curb, Gutter, and Concrete Curb and Gutter	LF	5,800			
	502.1			Concrete Sidewalks	SY	4,300			
	502.1A			Curb Ramps	EA	30			
	502.1B			Brick Residential Walkway	SY	15			
	502.1C			Flagstone Residential Walkway	SY	15			
	503.1			Portland Cement Concrete Driveway	SY	700			
	503.2			Portland Cement Concrete Driveway - Commercial	SY	180			
	505.1			Concrete Riprap (5" thick)	SY	25			
	506.1			Concrete Retaining Walls - Combination Type	CY	15			
	512.1			Adjusting Existing Manholes (Storm Sewer)	EA	10			
	512.1B			Adjusting Existing Manholes (AT&T)	EA	10			
	512.3			Valve Box Adjustment	EA	10			
	513.1			Removing and Relocating Mailboxes	EA	50			

CITY OF SAN ANTONIO

025 UNIT PRICING FORM

REVISED 12/2/13

PROJECT NAME: 2014 - 2015 Reclamation Task Order Contract Package 7

PROJECT NO. 23-01403-07-05-01

515.1		Top Soil	CY	140		
516		Sodding	SY	1,290		
522.1		Sidewalk Pipe Railing	LF	20		
523.1		Adjusting Vehicular Gates	EA	10		
523.2		Adjusting Pedestrian Gates	EA	4		
524.1		Concrete Steps	CY	15		
533-A		Eliminate Existing Pavement Markings and Raised Markers (4")	LF	200		
533-B		Eliminate Existing Pavement Markings and Raised Markers (8")	LF	100		
533-C		Eliminate Existing Pavement Markings and Raised Markers (12")	LF	100		
533-E		Eliminate Existing Pavement Markings and Raised Markers (24")	LF	100		
533-F		Eliminate Existing Pavement Markings and Raised Markers (SYMBOL)	EA	4		
533-G		Eliminate Existing Pavement Markings and Raised Markers (WORD)	EA	4		
533-H		Eliminate Existing Pavement Markings and Raised Markers (RR-Xing)	EA	2		
535.1		4" Wide Yellow Line	LF	4,400		
535.2		4" Wide White Line	LF	2,200		
535.4		8" Solid White Line	LF	1,100		
535.5		12" Wide White Line	LF	550		
535.7		24" Wide White Line	LF	150		
535.8		Right White Arrow	EA	5		
535.9		Left White Arrow	EA	5		
535.1		Combination Thru/Left White Arrow	EA	5		
535.11		Combination Thru/Right White Arrow	EA	5		
535.12		Word "ONLY"	EA	6		
535.13		Straight White Arrow	EA	5		
535.14		Railroad Crossing Symbol (two R's, crossbuck, 3 transverse bars)	EA	2		
535.16		Straight White Arrow Bicycle Facility	EA	10		
535.17		Bicycle Rider Symbol	EA	10		
535.22		White Sharrow (Bike Shared Lane)	EA	4		
537.1		Traffic Button (Type W)	EA	100		
537.2		Traffic Button (Type Y)	EA	100		
537.6		Pavement Marker (Type I-C)	EA	50		
537.8		Pavement Marker (Type II A-A)	EA	50		
537.9		Pavement Marker (Type II C-R)	EA	100		
624.2		Ground Boxes Type B (122322)	EA	4		
540.1		Rock Filter Dams (Install/Remove) Type 2	LF	200		
540.1		Rock Filter Dams (Sack Gabions) (Install/Remove) Type 4	LF	50		
540.9		Temporary Sediment Control Fence	LF	2,000		
540.10		Curb Inlet Gravel Filters	LF	500		
550.1		Trench Excavation Safety Protection	LF	100		
552.1		Removing and Relocating Irrigation Systems	LF	150		
712		Joint and Crack Sealing	LB	1,500		

SPECIAL SPECIFICATION
Item SP800 Project Signs

Article SP800.1. Description. Furnish, install, maintain, move and remove project information signs on each street whenever workmen, materials or equipment is present, or as directed. Project information signs will not be specific to any individual street within the program and may be moved from site to site and reused throughout the duration of the contract.

Article SP800.2. Materials. Furnish signs meeting the materials specifications of Item 531, the Barricade and Construction Standard details in the plans, and following the attached template of the layout, fonts, colors, size, and legend.


Article SP800.3. Construction. Erect all signs in conformance with the requirements of the TMUTCD and the Barricade and Construction Standard Details. It is the contractor's responsibility to see that all signs are properly installed and maintained at the job site. Erect project information signs at the locations directed by the Inspector, generally one sign facing each direction entering the project work area. Maintain the project sign so that no visual defect or graffiti is visible.

Article SP800.4. Measurement. Project signs will not be measured for payment.

Article SP800.5. Payment. The accepted quantity of signs shall not be paid for directly, but the cost for furnishing all materials, labor, tools, equipment and supplies to construct the signs, mountings, installation at the various street sites, maintaining the signs, moving the signs from street to street, and removal of signs will be subsidiary to the various items in the contract.

Bid Item: Not applicable

IMP Public Works sign specs.

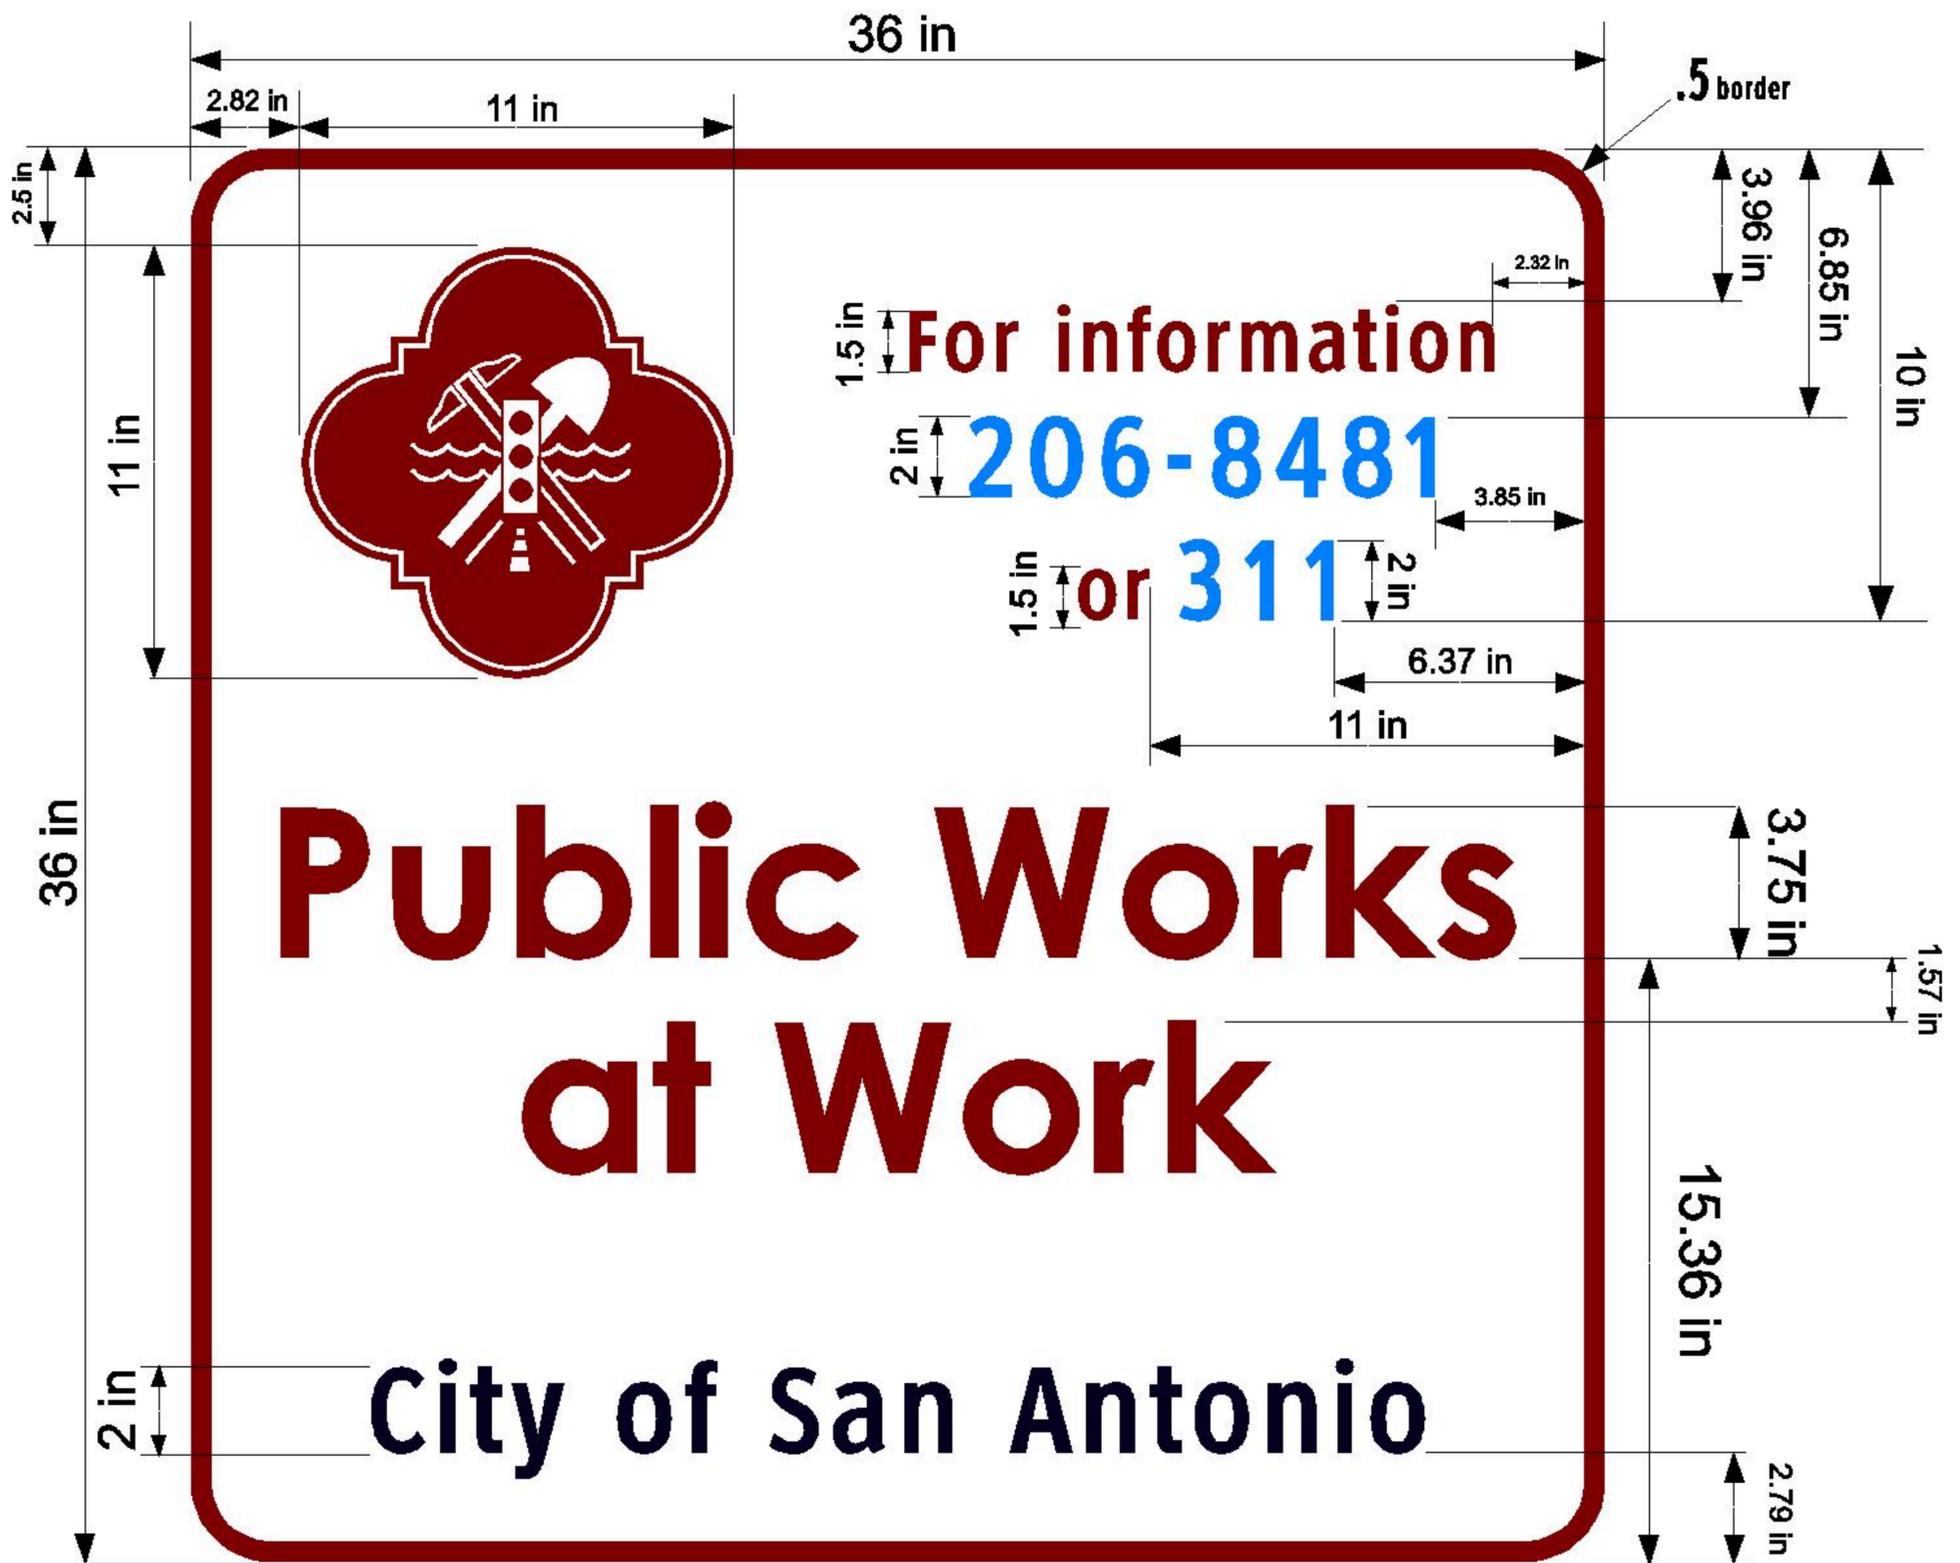

Colors: Burgundy vinyl, Columbia Blue vinyl, Black vinyl
Background: White High Intensity Prismatic sheeting.

Font: Century Gothic

Font: Clearview Hwy 2B

**Public Works
at Work**

**For information
206-8481
311**

City of San Antonio

2014 – 2015 Reclamation Task Order Contract Package 7 – Tentative FY 2014 List of Projects

Sacramento	Beacon Ave	Carney
Arroya Vista Dr.	Montview	Dead End
Breeden St	Fresno	Santa Monica
W. Myrtle St	N Comal St	N Flores St
Sun Beam	Supreme	Cul-De-Sac
Supreme	J St.	Action Ln.
Action Ln	Pecan Valley	Supreme
J St.	Pecan Valley Dr.	Dead End
Macdona	IH 35 S Access Rd	W. Pyron
War Cloud Dr.	Smoke Signal	Creek Bend Dr.

- Other projects as they become available for FY 2014 and FY 2015

**CITY OF SAN ANTONIO
DEPARTMENT OF PUBLIC WORKS**

RECEIPT OF ADDENDUM NUMBER(S) **1** IS HEREBY ACKNOWLEDGED FOR PLANS AND SPECIFICATIONS FOR CONSTRUCTION OF **2014 – 2015 Reclamation Task Order Contract Package 7**

FOR WHICH BIDS WILL BE OPENED ON **December 10, 2013**

THIS ACKNOWLEDGEMENT MUST BE SIGNED AND RETURNED WITH THE BID PACKAGE.

Company Name: _____

Address: _____

City/State/Zip Code: _____

Date: _____

Signature

Print Name/Title