


DATE: March 18, 2014
ADDENDUM NO: 3
PROJECT NO: 40-00372
OWNER: City of San Antonio
PROJECT: Lou Kardon Park Improvements




This Addendum generally is separated into Sections for convenience; however, all contractors, subcontractors, material men, and all other parties shall be responsible for reading this entire Addendum. The failure to list an item or items in all affected sections of this Addendum does not relieve any party affected from performing as per instructions, providing that the information is set forth one time any place in this Addendum. The Addendum forms a part of the Contract Documents, modifying and superseding where it is inconsistent with them. All other conditions of the Contract Documents remain unchanged.

ITEM NO. 1 (2) trash and (2) recycling receptacles are now included in the base bid. One trash and one recycling receptacles will be located at the base bid park tables location adjacent to the concrete pad of the park tables. The remaining trash and recycling receptacle to be located between the two relocated benches at the playground.


Detail of trash receptacle and locking mechanism attached (LouKardon-Trash-Receptacle-Detail.PDF).

ITEM NO. 2 There seems to be some discrepancies on the underground electrical duct bank fill and back fill requirements for branch circuits to light fixtures. Please advise.
Response: Reference attached typical underground conduit detail for requirements. (Ductbank.PDF)

ITEM NO. 3 Section 26 05 43 -3 calls for "concrete warning planks." Where are these located and how many are needed? Please advise.
Response: Warning planks not required, contractor to provide ductbanks with warning tape.

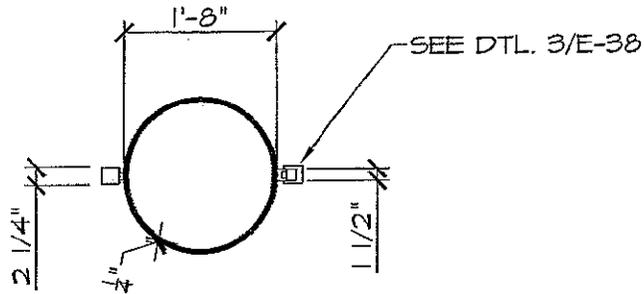

PLAN VIEW

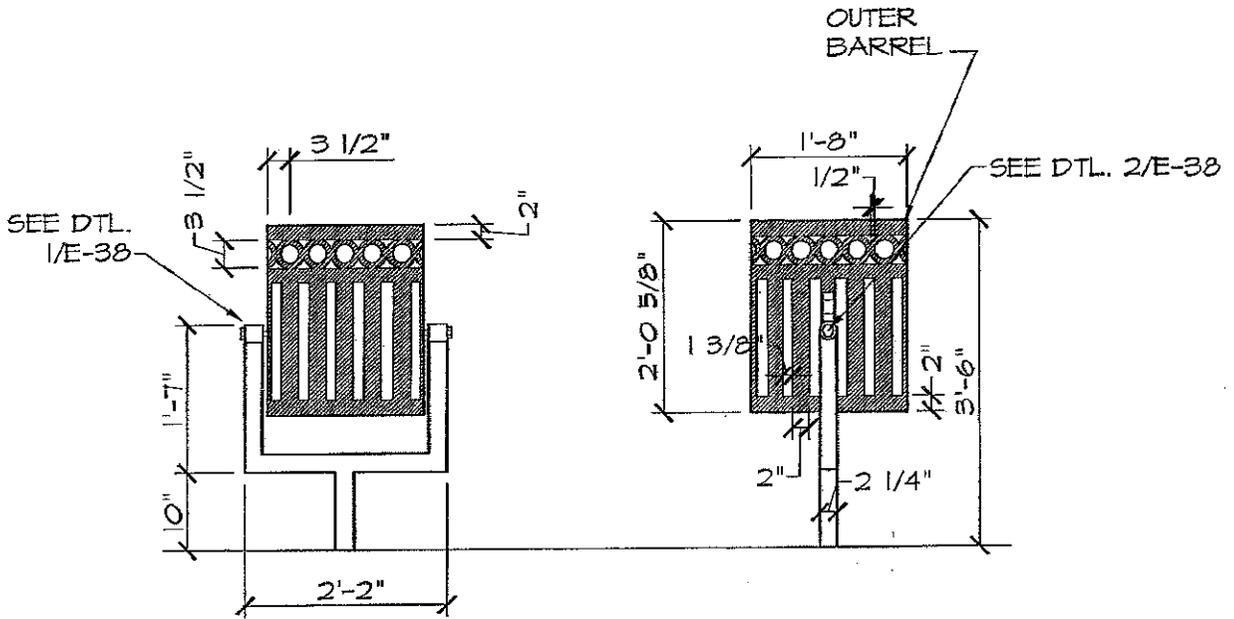

ELEVATIONS



TRASH RECEPTACLE PLAN AND ELEVATIONS

SCALE: 1/2" = 1'-0"


DRAWN BY:

REVISED:


DATE:

APPROVED BY:


DRAWING #: E-42

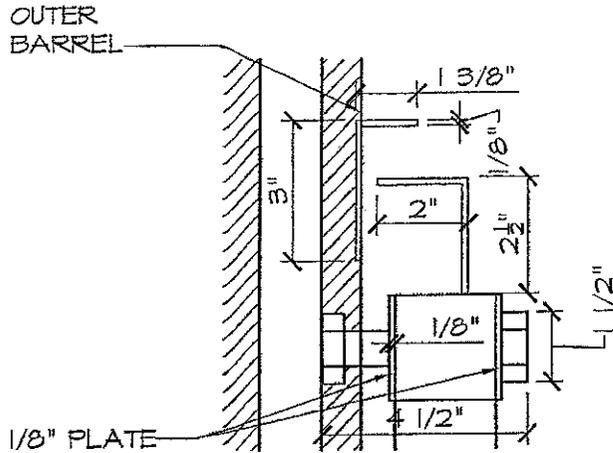

1. TRASH LOCK DETAIL

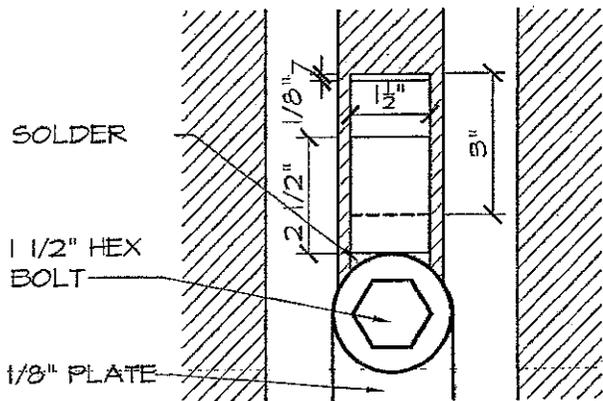

2. TRASH LOCK DETAIL

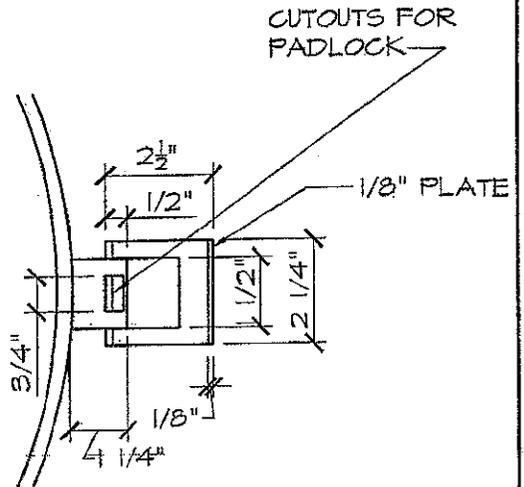

3. TRASH LOCK DETAIL



TRASH RECEPTACLE DETAILS -LOCKS

SCALE: 3" = 1'-0"


DRAWN BY:

REVISED:

DATE:

APPROVED BY:


DRAWING #: E-48

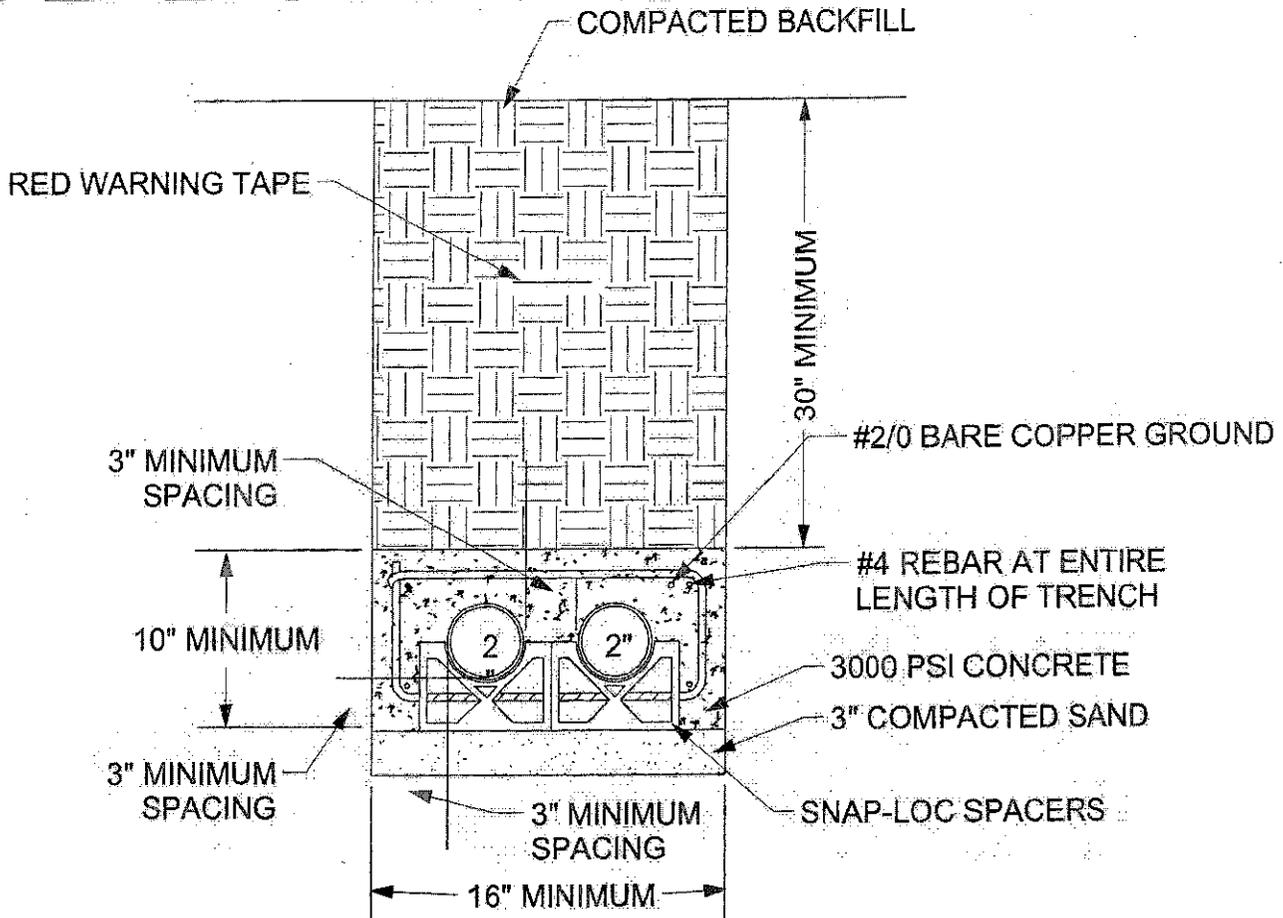

1 TYPICAL UNDERGROUND CONDUIT DUCTBANK DETAIL
SCALE: NOT TO SCALE

GENERAL NOTES: (DUCTBANK DETAIL ONLY)

1. PROVIDE CARLON, SNAP-LOC SPACERS ON 6'-0" CENTERS.
2. PROVIDE BEADED STRAP AND LOCKING KEY WAY FOR CONDUITS MOUNTED ON TOP OF SPACER RACK.
3. TOP OF CONCRETE CAP TO FINISHED SHALL BE A MINIMUM OF 30"
4. CONCRETE MIX SHALL CONTAIN RED DYE AT 8 LBS. PER CUBIC YARD OF CONCRETE.

 <p>1911 N. New Braunfels Ave. Ste. 201 San Antonio, Texas 78208 (210) 224-8841 (O), (210) 224-8824 (F)</p>	<p>PROJECT: Lou Kardon Park San Antonio, Texas</p>	<p>RFI #1</p>
		<p>DATE: 03/18/2014</p>
		<p>REF. SHEET #:</p>
	<p>DESCRIPTION: TYPICAL UNDERGROUND CONDUIT DUCTBANK DETAIL</p>	<p>DWG. NO.</p>

**CITY OF SAN ANTONIO
TRANSPORATION & CAPITAL IMPROVEMENTS
CONTRACT SERVICES DIVISION**

RECEIPT OF ADDENDUM NUMBER(S) 3 IS HEREBY ACKNOWLEDGED FOR PLANS AND SPECIFICATIONS FOR **LOU KARDON PARK IMPROVEMENTS** FOR WHICH BIDS WILL BE OPENED ON **MARCH 25, 2014.**

THIS ACKNOWLEDGEMENT MUST BE SIGNED AND RETURNED WITH THE BID PACKAGE.

Company Name: _____

Address: _____

City/State/Zip Code: _____

Date: _____

Signature

Print Name/Title